



Model: AH6676D(316)

Description: 2MP Starlight IP Cam, 316 stainless Casing

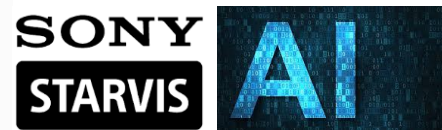

Feature:

- H.265, H.264, MJPEG tri-encoder
- Sony Starvis™ 1/2" Starlight sensor. Super low lux and full color
- Internal ICR, and long distance IR LED · Automatic day and night switch
- Cyber security :802.1x, IP filter, HTTPS, RTC
- 307 or 316 level stainless casing. Anti-salt casing for seashore application

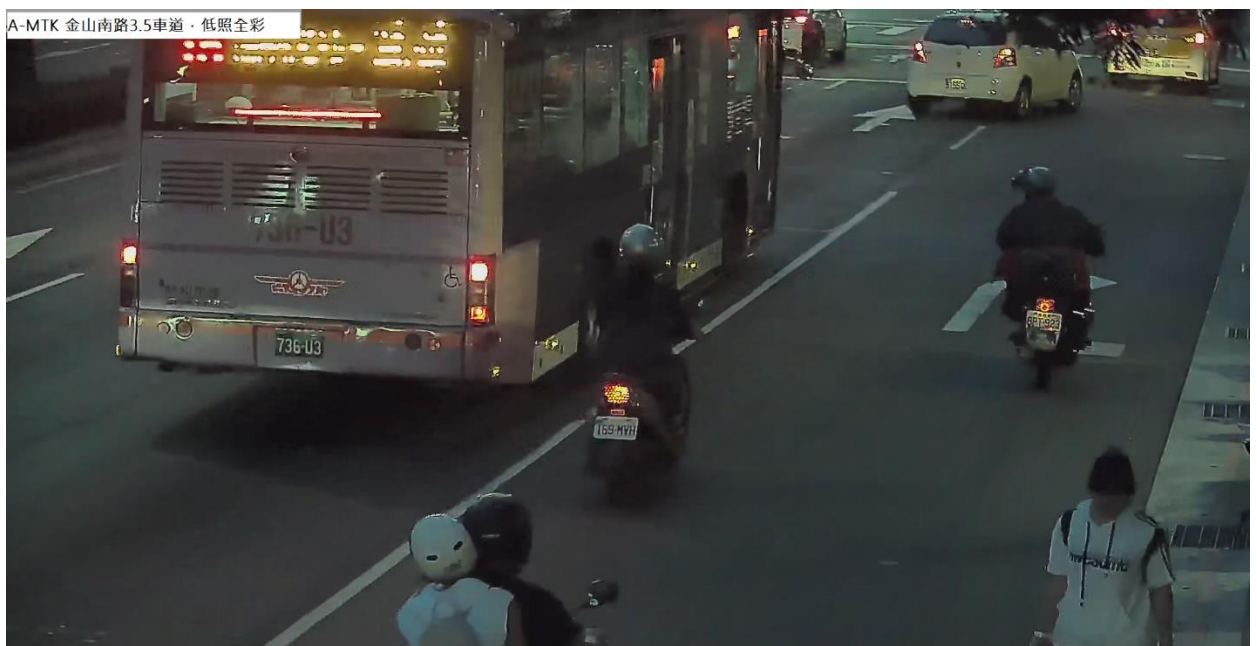



聯發光電股份有限公司

Tel: +886-2-82269855

www.a-mtk.com

sales@a-mtk.com

Specification:

Camera	
Image Device	Sony 1/2" CMOS sensor , 2MP Starlight super low lux sensor
Effective pixels	1920x1080
Lens focal length	Support C, CS mount. DC and P-iris lens (* contact your sales to order lens with camera)
Min. Illumination	Color: 0.01 lux @F1.2 (AGC on) B/W: 0.005 lux @F1.2 (AGC on)
Day & Night	Mechanical ICR, Support 3 modes: Fully automatic switching, manual switching, external DI switching
Shutter	1/5-1/10,000s -
WDR	Extreme WDR. Auto/Manual
Video	
Video Encoder	H.265, H.264 and MJPEG simultaneously
Video Profiles	Four-encoder simultaneously 1920x1080, 1280x720, 640x480, 320x240
Frame Rate	2MP 60fps mode
Exposure Control	Auto / Auto Indoor / Manual Exposure BLC Electronic Shutter Auto/Auto Indoor/Manual
Image Setting	AGC AE, AWB, Manual WB Control Automatic and manual shutter control 2D, 3D Noise reduction Color, brightness, sharpness, contrast, Hue Image Mirror/Flip, 90° Rotation
On Screen Display	Text, time and date overlay Multi-language OSD, user editable change font color, background color, and OSD location on screen
Network	
Application Programming Interface	ONVIF Profile G, S, T and updated ONVIF test tool
Supported Protocols	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, FTP, NTP, DNS, DDNS, DHCP, DIPS, ARP, Bonjour, UPnP, RTSP, RTP, RTCP, IGMP, PPPoE, 3GPP, Samba, ICMP, SNMP, QoS, 802.1x
Network Package	Support Unicast and Multicast
Cyber Security	Password protection, IP address filtering, HTTPS encrypted data transmission, user access log, 802.1x, RTC (realtime clock)
Users	10 simultaneous unicast users
Ethernet	10M/100M auto detection
Alarm	
Alarm Triggers	<ul style="list-style-type: none"> ● AI inside: Person detection, Car detection, Cross line, Restricted area (virtual fence) ● Camera IVA: Video motion detection: Cell motion, polygon area Camera Tampering Audio Detection (*MIC connected) Digital input Network Disconnect mSD card fail to read
Alarm Events	(Apply to camera AI trigger and IVA trigger) File upload via FTP server (picture) File upload via email (picture) File upload via Samba to NAS (picture) Send notification via HTTP, and TCP External output activation (DO) Audio alerting output



Tel: +886-2-82269855

www.a-mtk.com

sales@a-mtk.com

聯發光電股份有限公司

	Save to local mSD card (picture, and edge recording) ICR On/Off
General	
Power Supply	12V DC in
Working Temperature	-20°C to 65°C
Operating Humidity	20% ~ 80% (non-condensing)
Casing Degree	307 stainless (or 316 stainless) IP67 weather proof IK10 vandal proof
Certification	CEL EN55024, EN55032, EN50121, EN62328 FCC IEN60068 (temperature test) RoHS declaration
Viewing System	
OS	Windows® 7, 10
Browser	IE™, Chrome
Management Utility	
Batch management	IP Wizard III ™: Batch upgrade firmware, backup parameter, and restore parameter



聯發光電股份有限公司

Tel: +886-2-82269855

www.a-mtk.com

sales@a-mtk.com